



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 661 771 A2

12

EUROPEAN PATENT APPLICATION

21 Application number: **94120745.8**

51 Int. Cl.⁶: **H01P 1/213**

22 Date of filing: **27.12.94**

30 Priority: **28.12.93 JP 334262/93**

43 Date of publication of application:
05.07.95 Bulletin 95/27

84 Designated Contracting States:
DE FR GB IT NL SE

71 Applicant: **NEC CORPORATION**
7-1, Shiba 5-chome
Minato-ku
Tokyo (JP)


72 Inventor: **Suzuki, Takuya, c/o NEC Corporation**
7-1, Shiba 5-chome,
Minato-ku
Tokyo (JP)
Inventor: **Minowa, Yoshio, c/o NEC**
Corporation
7-1, Shiba 5-chome,
Minato-ku
Tokyo (JP)

74 Representative: **Glawe, Delfs, Moll & Partner**
Patentanwälte
Postfach 26 01 62
D-80058 München (DE)

54 **Branching filter for transmitter-receiver.**

57 A branching filter for a transmitter-receiver which is used in a microwave band comprising an orthogonal-mode transducer (waveguide branching filter), a reception filter comprising a band-eliminating filter 4 which is connected to the extension of the center axis of the waveguide of the orthogonal-mode transducer, and a transmission filter comprising a high pass filter containing a cut off waveguide which is directly and orthogonally connected to the orthogonal-mode transducer. The parts of the branching filter for the transmitter-receiver are integrally manufactured as one body by a lost wax process. Therefore, the branching filter for the transmitter-receiver can be manufactured as compact-size one body having no patch or linking portion.

F I G . 1

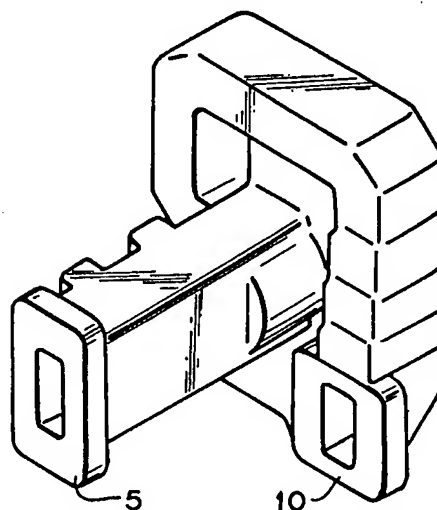

EP 0 661 771 A2

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a branching filter (distributor) for a transmitter-receiver, which has a transmitter port for receiving an input transmit signal, a receiver port, and an antenna port for receiving an input receive signal and is for distributing the input transmit signal to the antenna port and the input receive signal to the receiver port.

2. Description of Related Art

A branching filter for a transmitter-receiver is known as being used to commonly use an antenna for transmission and reception for using a microwave band. A conventional branching filter for a transmitter-receiver comprises a transmission filter, a waveguide branching filter coupled to the transmission filter, a bend waveguide coupled to the waveguide branching filter, and a reception filter coupled to the bend waveguide. In the conventional branching filter for the transmitter-receiver, it is impossible to easily and cheaply produce the branching filter, and it must be designed in larger size because the transmission filter, the reception filter, the waveguide branching filter and the bend waveguide filter are separately fabricated.

On the other hand, a transmitter-receiver comprises a transmitter module, a branching filter module coupled to the transmitter module, and a receiver module coupled to the branching filter module.

In a conventional transmitter-receiver, a transmitter module comprises a transmitter connector, and a receiver module comprises a receiver connector. On putting the transmitter-receiver in operation, a cable is connected to the transmitter connector and the receiver connector. Points of connection of the cable to the transmitter connector and the receiver connector are covered for hermetic seal and for insuring waterproofness by a first and a second connector cover. It is hardly possible in the conventional transmitter-receiver to exchange the first and the second connector covers to new covers.

Fig. 4 is an exploded perspective view showing a conventional separate type branching filter for a transmitter-receiver as disclosed in U.S. Patent No. 5,243,306. This branching filter for the transmitter-receiver was proposed to overcome the "large-size structure problem" of the branching filter for the transmitter-receiver as described above.

As shown in Fig. 4, the conventional branching filter for transmitter-receiver basically comprises three parts, that is, a first part 101, a second part 102 which is detachably coupled to the first part

101 and a third part 103 which is detachably coupled to the second part 102. The first part 101 includes an antenna port, a part of a waveguide branching filter (orthogonal transducer) and a part of a reception filter. The second part 102 includes the residual (other) part of the waveguide branching filter, the residual (other) part of the reception filter and a part of a transmission filter. The third part 103 includes the residual (other) part of the transmission filter. The reception filter which is assembled by the first and second parts 101 and 102 is provided with a bend waveguide 104 to facilitate a connection work between the branching filter and a transmitter-receiver.

Fig. 5 is a cross-sectional view showing an assembly of the first, second and third parts 101, 102 and 103. The assembly is designed in a dimension of about 160 mm (height) X 80 mm (width), for example. Fig. 6 is a cross-sectional view showing partially the third part 103 shown in Fig. 4. The third part 103 is designed in a dimension of about 70 mm (width) X 65 mm (height), for example.

In the conventional branching filter for transmitter-receiver as described above, each of the waveguide branching filter, the transmission filter and the reception filter is divided into plural parts, and these plural parts are fabricated into a waveguide. Therefore, if each part is manufactured with an dimensional error or fabricated with a positional error, a step portion would occur at a divisional (partitional) face portion of the finally-fabricated waveguide (i.e., at the boundary between the parts constituting the waveguide) because of the dimensional or positional error.

If a step portion occurs at the divisional face portion of the waveguide of the waveguide branching filter, cross-polarized discriminating power (XPD) is deteriorated. Further, if a step portion occurs at the divisional face portion of the waveguide of each of the transmission filter and the reception filter, intrinsic impedance of each filter is deteriorated. In this case, the impedance of each filter is deviated from a predetermined impedance to induce reflected wave or standing wave, resulting in occurrence of transmission loss.

Further, since the branching filter for transmitter-receiver is constructed by assembling plural parts, fixing members for fixing the respective parts are required, and thus the branching filter for a transmitter-receiver must be designed in large size.

Still further, as described above, the bend waveguide is provided to the reception filter side. Therefore, in a case where the bend waveguide is disposed between the reception filter and the reception connection port, the branching filter for the transmitter-receiver must be designed in large size. On the other hand, in a case where the bend

waveguide is disposed between the reception filter and the waveguide branching filter, the total length of the branching filter and a transmitter-receiver when the transmitter-receiver is connected to the branching filter is excessively large.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a branching filter (distributor) for a transmitter-receiver which can be miniaturized without increasing the total length when the branching filter and the transmitter-receiver are connected to each other, and which requires no fabrication or assembling process.

In order to attain the above object, the branching filter for a transmitter-receiver according to the present invention includes an orthogonal-mode transducer (waveguide branching filter) having an antenna port at one side thereof, a reception filter which is connected at one side thereof to an extension of the central axis of the waveguide of the orthogonal-mode transducer through an impedance converter and has a receiver port at the other side, and a transmission filter having a cut off waveguide whose impedance is matched by an L-rod (inductive susceptance) and which is orthogonally and directly connected to the orthogonal-mode transducer at one side thereof and has a transmitter at the other side thereof, wherein the orthogonal-mode transducer, the reception filter and the transmission filter being integrally constructed by one part.

Further, the transmission filter may be spirally formed around the central axis of the waveguide of the orthogonal-mode transducer to miniaturize the whole construction of the branching filter for transmitter-receiver. In addition, the surrounding body of the waveguide may be formed to be uniform thickness and miniaturized, so that the branching filter for the transmitter-receiver can be manufactured as an integral body of one part using a lost wax casting method which is suitable for mass production.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view showing a branching filter for a transmitter-receiver of an embodiment according to the present invention;

Fig. 2 is a cross-sectional view showing the branching filter for the transmitter-receiver of the embodiment of Fig. 1;

Fig. 3 is a cross-sectional view of spiral waveguide passageways portion showing the branching filter for the transmitter-receiver of the embodiment of Fig. 1;

Fig. 4 is an exploded view showing a conventional branching filter for a transmitter-receiver;

Fig. 5 is a cross-sectional view showing the conventional branching filter for the transmitter-receiver with actual dimension; and

Fig. 6 is a cross-sectional view showing the third part with actual dimension.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A preferred embodiment according to the present invention will be described hereunder with reference to the accompanying drawings.

Fig. 1 is a perspective view showing a branching filter for a transmitter-receiver according to an embodiment of the present invention, Fig. 2 is a cross-sectional view of the branching filter for the transmitter-receiver, which is taken along the center axis of a reception filter, and Fig. 3 is a cross-sectional view of the branching filter for the transmitter-receiver, which is taken along the center axis of a transmission filter.

As shown in Figs. 1 and 2, the branching filter for the transmitter-receiver of this embodiment is functionally divided into three parts, an orthogonal-mode transducer 1 serving as a waveguide branching filter, a band-elimination filter 4 serving as a reception filter and a high pass filter 8 serving as a transmission filter, however, these parts are manufactured as one body while structurally have thin and unified thickness. The orthogonal-mode transducer 1 has an antenna port 2 at one end thereof (corresponding to one end of the extension of the center axis of the waveguide of the orthogonal-mode transducer 1) while it has an impedance transformer section 3 at the other side thereof and is connected to the band-eliminating filter 4 through the impedance transformer section 3 at the reception side. The band-eliminating filter 4 has a receiver port 5 at one side thereof which is opposite to the orthogonal-mode transducer side. The band-eliminating filter 4 includes plural cavities 6 and plural bosses 7, and the cavities 6 are disposed at intervals of quarter wavelength or three-quarter wavelength. The high pass filter 8 serving as the transmission filter has an impedance transformer section 9 and a transmitter port 10, and is orthogonally connected to the orthogonal-mode transducer 1. That is, the orthogonal-mode transducer 1 is connected through the impedance transformer section 3 and the band-eliminating filter (reception filter) 4 to the receiver port 5, and also connected through the high pass filter (transmission filter) 8 and the impedance transformer section 9 to the transmitter port 10.

The high pass filter 8 is constructed by a cut off waveguide which is provided with an L-rod

(inductive susceptance) 11 to match its impedance with that of the orthogonal-mode transducer 1 and is designed so that the H-plane (magnetic field plane) of the waveguide is slightly made thin, that is, so that the waveguide path is further thinned. Particularly, the portion of the high pass filter 8 at the transmitter port side is constructed by a step conversion waveguide (impedance conversion waveguide). Further, the dimension (length and width) of the cut off waveguide 12 is determined to obtain such an attenuation amount that signals on a reception frequency band are not filtered. The transmission filter 8 is disposed in a spiral form around the center axis of the waveguide of the orthogonal-mode transducer 1.

This invention is not limited to the above embodiment, and various modifications may be made without departing from the subject matter of this invention. For example, the orthogonal-mode transducer 1 may be designed to have a circular or rectangular shape in section. The orthogonal-mode transducer 1 may be provided at one end thereof with a circular or rectangular coupling hole through which reception wave is taken out, and also provided at the wall thereof with a rectangular coupling hole through which transmission wave is fed out.

Further, the reception filter 4 may be constructed by a band rejection filter (the band eliminating filter) in which rectangular cavities 6 for eliminating transmission frequency band signals are provided on the H-plane of the rectangular waveguide (magnetic field plane) and circular or rectangular bosses 7 for pass band matching may be provided on the opposite (confronting) sides of the rectangular cavities 6.

In addition, the transmission filter 8 may have the cut off waveguide 12 in which the H-plane of the rectangular waveguide to pass the transmission high frequency wave is made thin toward the E-plane, and further the transmission filter 8 may be provided with the stepwise impedance transformer waveguide 9 for impedance matching at the transmitter port side 10 and also provided with the flat-boss-type L-rod (inductive susceptance) for impedance matching at the connection side thereof with the orthogonal-mode transducer 1.

Further, the transmission filter 8 may be spirally disposed around the center axis of the waveguide of the orthogonal-mode transducer.

As shown in Figs. 2 and 3, the branching filter for the transmitter-receiver of this embodiment may be designed in a dimension of 70 mm X 55 mm, and the transmission side may be also designed in a dimension of 60 mm X 55 mm, so that the whole size of the branching filter for the transmitter-receiver is extremely small. Therefore, the lost wax process which is excellently and suitably used for compact casting products can be applied to pro-

duce the branching filter for the transmitter-receiver of this embodiment. If the lost wax process is applied, the branching filter can be integrally formed as one body having uniform thickness as a whole.

The branching filter for the transmitter-receiver (distributor) of this invention can be also integrally formed in a lost wax process (investment casting process). In this process, a dummy (model) is first formed of wax and placed in a vessel. Thereafter, casting material such as ethyl silicate $[\text{Si}(\text{C}_2\text{H}_5\text{O})_4]$ is filled into the vessel, congeal as a whole and heated to melt the wax and discharge the melt wax from the vessel, thereby forming a casting product. Through this process, the bosses 7, the cavities 6, the impedance transformer section 3, the cut off waveguide 12 and the L-rod 11 can be simultaneously and integrally manufactured as one body. Therefore, the casting product (branching filter for a transmitter-receiver) having no patch and no joint portion can be integrally manufactured as one body with high precision.

As described above, according to the present invention, the reception filter is connected through the impedance transformer section onto the waveguide axis of the orthogonal-mode transducer, so that the reception filter can be shortened. Further, the orthogonal connection between the transmission filter and the orthogonal-mode transducer enables the direct connection between the orthogonal-mode transducer and the cut off waveguide whose impedance is matched by the L-rod, so that no impedance transformer section is required and the transmission filter can be shortened. Further, the transmission filter is spirally disposed around the center axis of the waveguide of the orthogonal-mode transducer, so that the whole branching filter for the transmitter-receiver can be miniaturized. In addition, the surrounding body of the waveguide is designed to be uniform, so that the branching filter for the transmitter-receiver can be integrally produced as one body by the lost wax process which is most suitable to mass-produce compact casting products. In the branching filter for the transmitter-receiver which is manufactured by the lost wax process, the waveguide of each of the orthogonal-mode transducer, the transmission filter and the reception filter has no dividing surface, so that the deterioration in XPD and impedance matching can be more intensively and synergistically suppressed.

Claims

1. A branching filter for a transmitter-receiver, comprising:
an orthogonal-mode transducer for having an antenna port;

a reception filter for connecting to an extensive way of a center axis of a waveguide of said orthogonal-mode transducer at one end thereof and having a receiver port at the other end thereof; and

a transmission filter for having a cut off waveguide which is orthogonally connected to said orthogonal-mode transducer at one end directly thereof, and a transmitter port at the other end thereof, wherein said orthogonal-mode transducer, said reception filter and said transmission filter are integrally manufactured as one body with no fabrication process.

2. The branching filter as claimed in claim 1, wherein said orthogonal-mode transducer comprises a waveguide having a circular or rectangular shape in section, and said waveguide is provided at one end thereof with a circular or rectangular coupling hole through which reception wave is taken out, and also provided at the wall thereof with a rectangular coupling hole through which transmission wave is fed out.

3. The branching filter for the transmitter-receiver as claimed in claim 1, wherein said reception filter comprises a band-eliminating filter in which rectangular cavities for eliminating transmission frequency band signals are provided on the H-plane of the rectangular waveguide thereof and circular or rectangular bosses for pass-band matching are provided on the confronting surface of the rectangular cavities.

4. The branching filter for the transmitter-receiver as claimed in claim 1, wherein said transmission filter comprises a high pass filter having a cut off waveguide of rectangular waveguide which serves to pass transmission wave and is designed to be thin along the H-plane of the rectangular waveguide thereof, an impedance conversion waveguide for impedance matching at the transmitter port side, and an L-rod (inductive susceptance) for impedance matching at a connection side with said orthogonal-mode transducer.

5. The branching filter for the transmitter-receiver as claimed in claim 1, wherein said transmission filter is disposed in a spiral form around the center axis of the waveguide of said orthogonal-mode transducer.

6. A branching filter for the transmitter-receiver for a transmitter-receiver, comprising:
a flange for having an antenna port;
an orthogonal-mode transducer for coupling to said flange;

a transmission filter for connecting to said orthogonal-mode transducer and having a cut off waveguide and a transmitter port; and

a reception filter which is connected to said orthogonal-mode transducer and has a receiver port, wherein said flange, said orthogonal-mode transducer, said transmission filter and said reception filter are integrally manufactured as one body.

7. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said reception filter comprises a band-eliminating filter.

8. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said transmission filter comprises a high pass filter.

9. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said transmission filter comprises a band-eliminating filter.

10. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said high pass filter of said transmission filter is spirally formed.

11. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said antenna port, said transmitter port and said receiver port are integrally manufactured.

12. The branching filter for the transmitter-receiver as claimed in claim 6, wherein said branching filter for the transmitter-receiver is integrally manufactured as one body by a lost wax process.

13. The branching filter for the transmitter-receiver as claimed in claim 11, wherein said branching filter for the transmitter-receiver is integrally manufactured as one body by a lost wax process.

14. The branching filter for the transmitter-receiver as claimed in claim 12, wherein said transmission filter comprises a band-eliminating filter.

FIG. 1

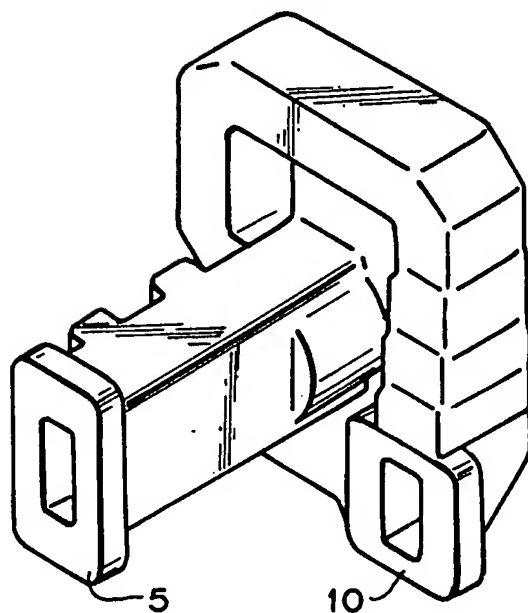


FIG. 2

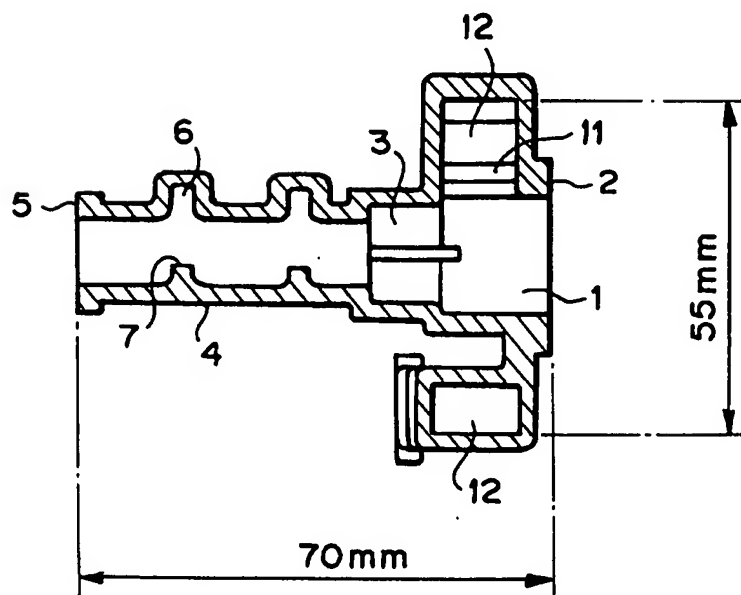


FIG. 3

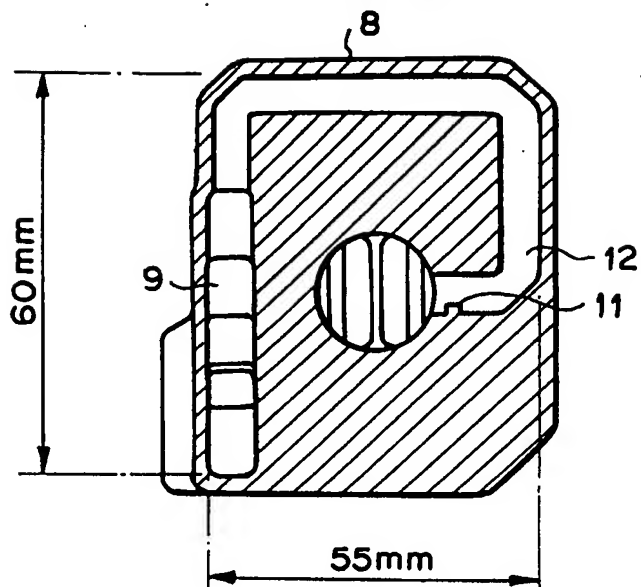


FIG. 4

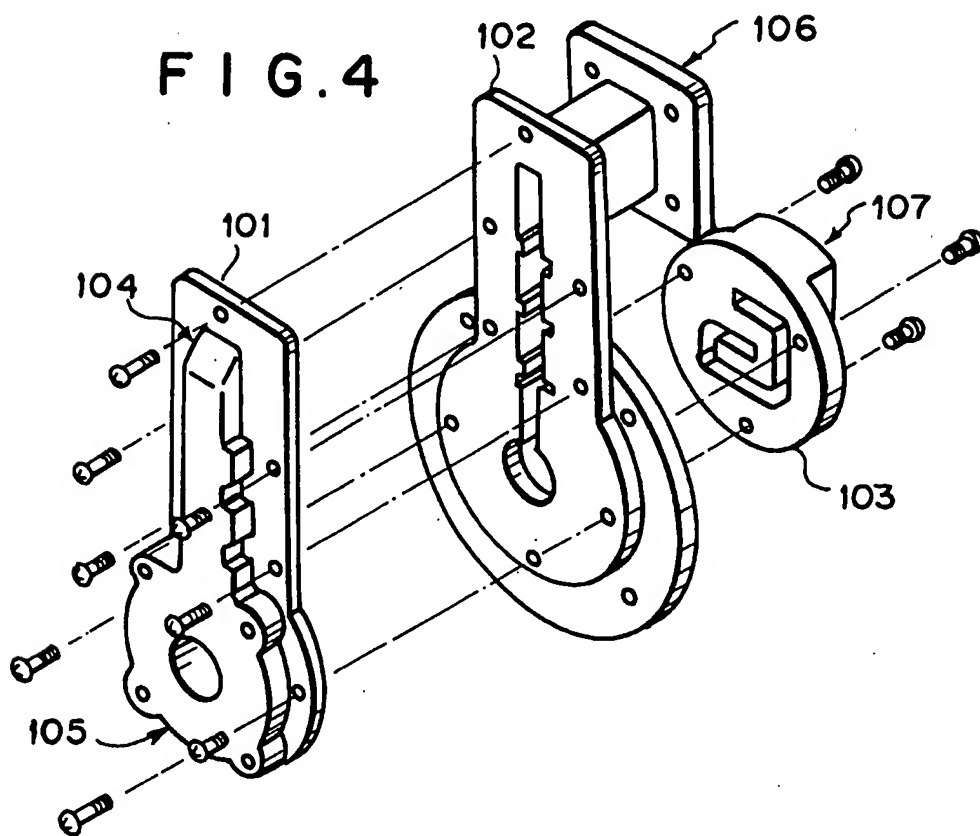


FIG. 5

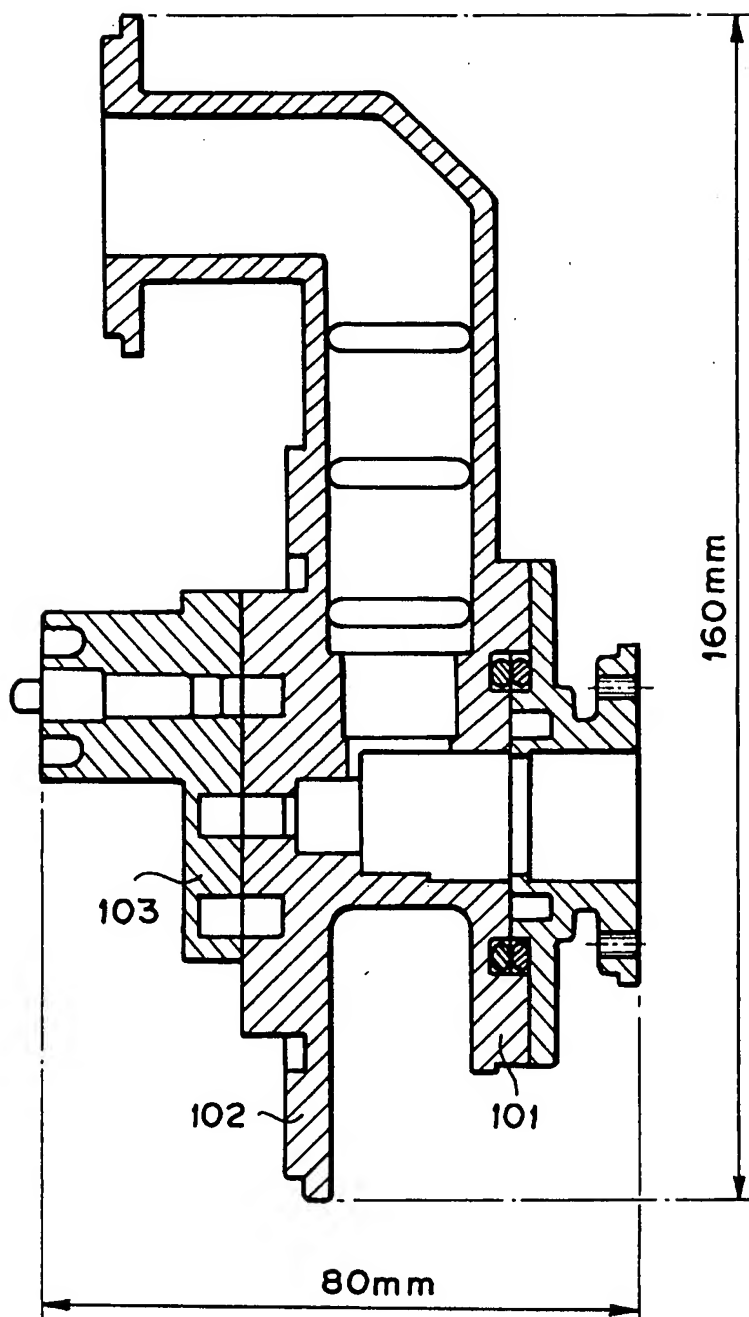


FIG. 6

